

ROLLING COVER INSTALLATION INSTRUCTIONS


IMPORTANT SAFETY INSTRUCTIONS

INSTALLATION INSTRUCTIONS

- 1 Position the rolling cover on the spa/swim spa and then open it until it lays all flat on the spa/swim spa.
- 2 Roll up the cover from the opposite direction of where it is rolled previously, in order to make the whole structure stand straight.
- 3 Two people standing at both ends of the cover, pull the two safety straps at each end at the same time, until the roll away cover becomes smooth and does not wrinkle and fits the entire spa/swim spa perfectly.

(Special notes: If you don't have enough strength, you can use a buckle tensioner to help.)

- 4 Pull the strap tightly downward, then press the buckle against the spa/swim spa cabinet.
- 5 While holding the buckle against the cabinet, release the strap from the buckle, and mark the three mounting locations onto the cabinet.
- 6 Use the supplied screws to secure the buckle onto the cabinet.
- 7 Repeat steps 4-6 for the remaining straps.

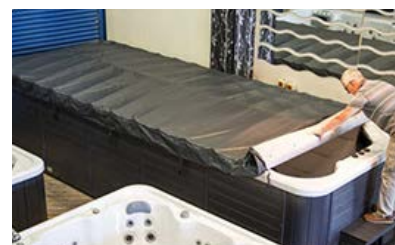

WARNING – IMPORTANT FOR SAFETY

- 1 Keep children away to avoid possible entrapment.
- 2 Children or objects cannot be seen under rolling cover.
- 3 Remove the rolling cover completely before entry of bathers.
- 4 Stay off the rolling cover, it does not support weight.
- 5 Non-secured or improperly secured rolling covers are a hazard.

WARRANTY OF ROLLING COVER

How to obtain warranty when defect becomes apparent during the warranty period:

- Upon discovery of any defect within warranty period (2 years), contact support@galaxyspas.co.nz.
- Additional information may be needed which could include pictures.
- Freight to and from us for a repaired or replaced cover is to be paid by the purchaser.
- Proof of purchase must accompany the defective rolling cover.

Warranty Exclusions:

- Normal and natural fading and minor deterioration.
- Damages, such as but not limited to, snow, wind, falling objects, animals or any other acts of God.
- Spa cover has been subjected to any alterations, misuses, abuses, or if any repairs are attempted by anyone other than us.
- Damages as a result of improper operation, such as but not limited to violently dragging or pulling the cover, improperly storing, transportation, installing or unlocking the buckles when the rolling cover is covering the spa or swim spa.
- Damages or discoloration as a result of improper water chemistry maintenance, including excessive chlorination, bromination, or contact of chemicals onto cover.
- Discoloration as a result of not using any colour-maintain agent or waterproof agent.
- Defects caused by a component, or part that is not part of the rolling cover, such as a cover lifter.
- Chafing or wearing holes due to dragging on rough surfaces or sharp objects.
- Torn handles – handles are designed to open the cover only, not for carrying or removing the cover from the spa.
- Torn tie-downs – tie-down straps are designed to secure the cover only, not for opening or removing the rolling cover from the spa/swim spa.

- Missing black caps - any missing of the black caps due to violent dragging or pulling occurs, alternative black caps will be supplied only instead.
- Water-logging or accumulation of water between the two support rods of the rolling cover is not covered by the warranty.

CARE AND MAINTENANCE

- 1 Avoid exposing the rolling cover to excessive chemicals and remove rolling cover when adding chemicals.
- 2 Maintain proper spa/swim spa water chemistry. Any texture change or extreme discoloration of bottom material indicates chemical burn.
- 3 Keep the rolling cover clean, free of dirt and debris. Remove leaves or other debris to avoid colour leaching.
- 4 Avoid water and snow from accumulating.
- 5 Use a colour-maintain spray on the cover every season to maintain its colour.
- 6 Use a waterproof agent spraying on the cover every 6 months to give a guard.
- 7 Use a mild detergent and water solution to clean the outer fabric portion monthly.
- 8 Avoid scraping the rolling cover on rough surfaces.
- 9 Avoid jerking or pulling the rolling cover to protect threads from tearing the vinyl.
- 10 Always unfasten all hardware before opening the rolling cover. Gently roll the rolling cover onto itself.
- 11 Do not sit, walk, or lay on the rolling cover and avoid placing any heavy objects on the rolling cover.
- 12 Remove any water/snow accumulation between two support rods of the rolling cover after a rainy/snowy day, in order not to cause any further damage to the cover or to leave a dirty water mark on the top surface material.